

ACS



FLOWN WIRE SYSTEMS

CAMCAT® Standard

The CAMCAT® Standard is an advanced fully remote controlled cable camera system designed to run between two fixed points up to 750m apart at speeds of up to 70km/h.

The CAMCAT® Standard camera buggy can accept a range of payloads including platform stabilised mounts fitted with different cameras up to 35mm or IMAX as well as stabilised mount with integrated camera and lens.

Compatible open platform stabilised mounts include:
Libra Head, Scorpio Head, Stab-C Compact, Mini-C and Flight Head.

Compatible stabilised mounts with integrated camera and lens include:
Wescam and Cineflex.



Technical Specifications


MAXIMUM SPEED:	70km/h (44mph) 5.7 seconds or 57m to top speed
MAXIMUM ACCELERATION:	3.25m/second
MAXIMUM LENGTH:	Standard length up to 750m/2460ft Longer length by request
DIMENSIONS (Base):	Length: 5m (16.4ft) Height: 1.5-4.5m (4.9-14.7ft) Width: 2.6m (8.5ft) Weight: 650KG (1433lbs)
POWER SUPPLY:	Power current (3 x 400 volt) - 32 Amp
PROOF OF STATIC:	Doc. No 98 RIH 42/907

Certified by the German Health & Safety Group (TUV) including BGVC1

Developed by CAMCAT Systems GmbH and operated in co-operation with ACS

CAMCAT®

CAMCAT-SYSTEMS GMBH

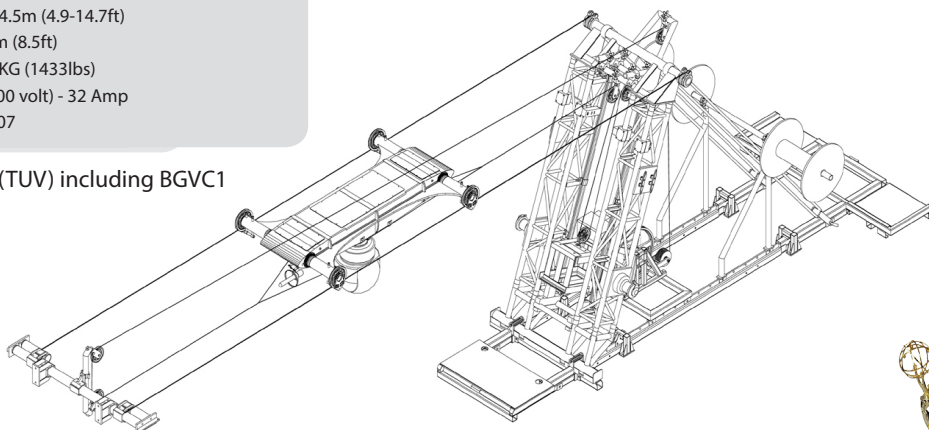

t: +44 (0)1483 426767 e: enquiries@acsmedia.com w: acsmedia.com

